



1502 109th Street
Grand Prairie, Texas 75050
(972) 647-1056 Fax (972) 606-1076

Manufacturers and Distributors of Heating and
Air Conditioning for Heavy Duty Equipment
www.visionaire-inc.com

34-7070-200 CONSOLE


Visionaire is now shipping a new and better console with our 7070 models of A/C. It has greater air distribution and is easier to install – not to mention looks great. In addition to the newer console, we are also using a robust and more rugged solenoid valve for the heater circuit that is much more reliable and not as acceptable to leaks. The pictures that follow are some of the changes and are part of our continued effort to supply the best quality to customers.



This is how console looks out of the shipping box. You should have the console, wire harness extension, and snap in louvers.



Remove the two thumb screws and the retaining metal hold down – then the filter will slide out of the plastic, there are tabs in the filter opposite of the thumb screws.

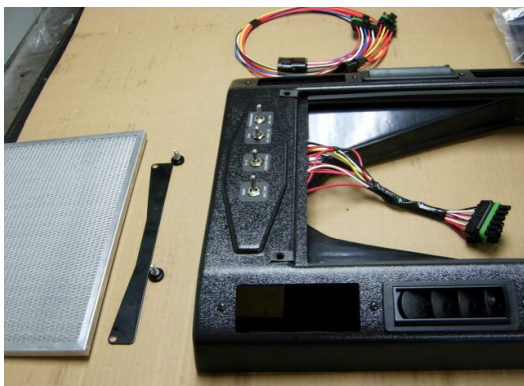


With the filter off you will have access to the wiring harness and will be easier to hook up.




There are 4 holes (one in each corner) that will align with the unit, make sure the blower outlet is to the side of the switches of the console. Use 5/16 - 18 bolts with a flat washer(not provided), size accordingly to your roof thickness. You may need to seal the discharge area with foam to direct air into console



Reach up into the return air side of the unit on the roof and pull down the wire pigtail. If it will reach, plug it directly into the console. If it is short we have added an extension that can only be installed in one direction.

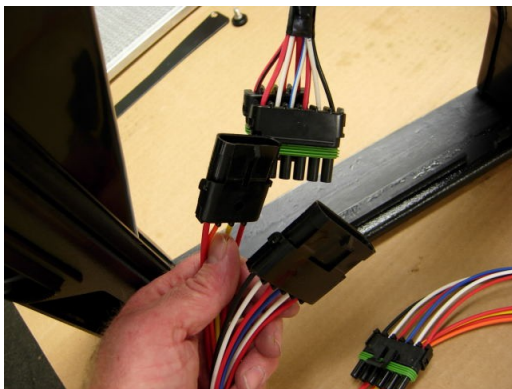

Clip the water tight connections together and push the wires back up into the return air side of the unit.

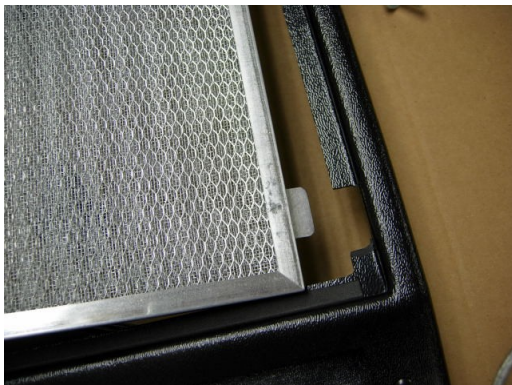


Reinstall the filter, make sure the tabs are to the bottom and are inserted into the slots in the console.



Align the filter hold down piece and fasten with thumb screws. An added benefit is this filter is easy to remove and can be rinsed with a garden hose for cleaning.



Snap in the remaining louvers, it is best if they all face one direction - but they are easily removed and turned to your liking.

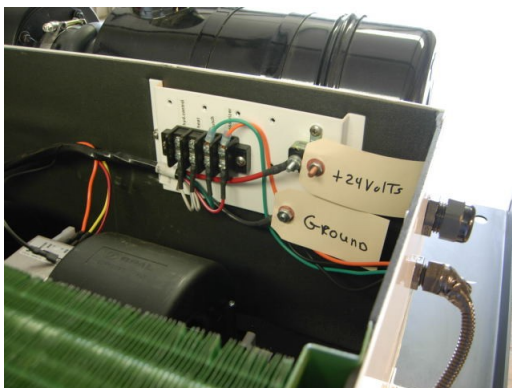

Bonus upgrade:
Pictures of a new heavy duty solenoid valve along with the same heat trigger terminal. A new wiring diagram is added to ship with the units and the difference is internal to the unit and should have little impact on the end user.